




Afmetingen

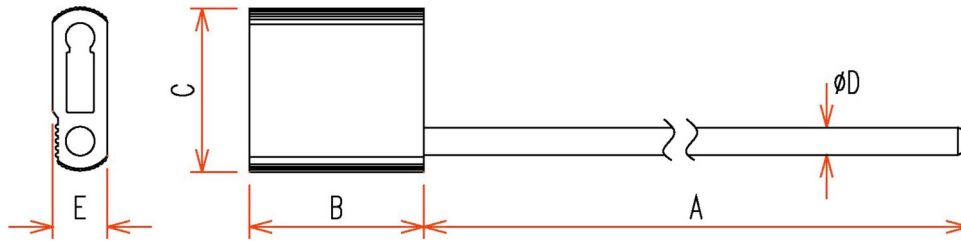

Typ	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
AluLock V2 D1.5 300	300	26	22	1.5	6
AluLock V2 D2.0 300	300	26	22	2.0	7
AluLock V2 D2.5 300	300	26	22	2.5	7
AluLock V2 D3.5 300	300	32	22	3.5	8.5
AluLock V2 D4.0 300	300	38	22	3.5	8.5
AluLock V2 D5.0 300	300	32	30	5.0	10


Specifications

Material : Body - Aluminium
Cable - Non-preformed galvanized steel aircraft cable


Packaging

Product	Carton					
	QTY	L	W	H	V(M³)	Weight kg
AluLock V2 1.5 300	500	400	185	200	0,0148	5.80
AluLock V2 2.0 300	250	400	185	200	0,0148	4.30
AluLock V2 2.5 300	250	400	185	200	0,0148	4.60
AluLock V2 3.5 300	250	400	185	200	0,0148	7.20
AluLock V2 4.0 300	100	400	185	200	0,0148	6.70
AluLock V2 5.0 300	150	400	185	200	0,0148	8.80


Applications

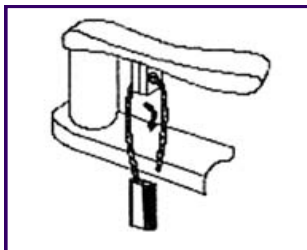


1. Loop the cable through the item to be sealed

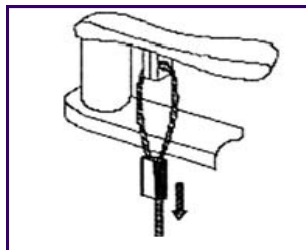

2. Insert and pull the cable through the locking chamber

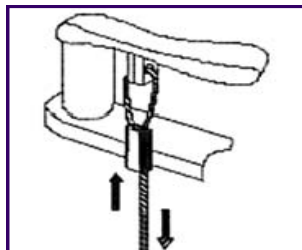

3. Pull the cable all the way through the body until item is tightly sealed, then pull at body to ensure seal is locked

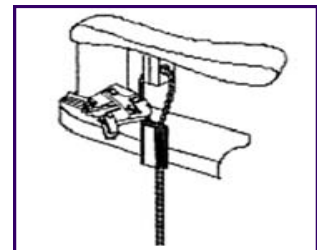

4. Remove seal with the appropriate cable cutters (eyes protection is recommended)

ISC Security Products

Jhr. Mockade 27 • 2181 AL HILLEGOM NL

T. +31 252 750480 • E. info@security-seals.global • W. www.security-seals.global