

AluLock® V2

ISC

Security Seals

AluLock V2 is a variable length cable seal that provides a high level of security through its unique locking mechanism and cable design. Cable sizes with diameter 3.5mm, 4.0mm and 5.0mm have successfully passed the stringent ISO 17712:2010 test to qualify as HIGH security and C-TPAT compliant seals.

APPLICATIONS

- Shipping containers
- Rail trucks
- Plastic distribution boxes
- Petrochemical valves

FEATURES

- Non-preformed cable unravels when cut
- Galvanized steel cable, removable only with tool
- ISO17712:2010 & C-TPAT compliant (Ø3.5, Ø4.0 & Ø5.0)

BENEFITS

- Prevents tampering by cable cutting and reusing of seal
- Suitable for securing valuables for long periods of time
- Used to secure import/export goods worldwide

SPECIFICATIONS

Product Name	Size	Strength
AluLock V2 D1.5 300	- Ø1.5x300mmL	>200kg
AluLock V2 D2.0 300	- Ø2.0x300mmL	>350kg
AluLock V2 D2.5 300	- Ø2.5x300mmL	>450kg
AluLock V2 D3.5 300	- Ø3.5x300mmL	>1020kg
AluLock V2 D4.0 300	- Ø4.0x300mmL	>1020kg
AluLock V2 D5.0 300	- Ø5.0x300mmL	>1250kg
* Customized cable lengths available		

Material

Aluminium housing, non-preformed galvanized steel aircraft cable

Print

- Laser for anodized colours with logo & serial number
- Inkjet for powder coated with text & serial number

Colour

- Standard colours (Anodized) : Red, Blue, Bronze & Black
- Special colours (Anodized) : Green & Silver
- Special colours (Powder Coated) : Yellow, White

Packaging

- AluLock V2 D1.5 - 500pcs/carton
- AluLock V2 D2.0 - 250pcs/carton
- AluLock V2 D2.5 - 250pcs/carton
- AluLock V2 D3.5 - 250pcs/carton
- AluLock V2 D4.0 - 100pcs/carton
- AluLock V2 D5.0 - 150pcs/carton




HIGH SECURITY SEALS

PRODUCT INFORMATION

DIMENSIONS

Security Seals

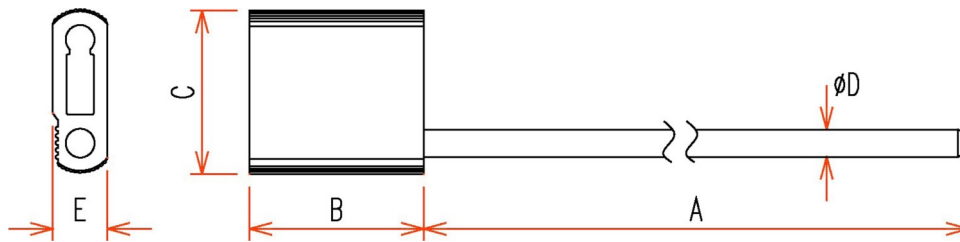

Typ	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
AluLock V2 D1.5 300	300	26	22	1.5	6
AluLock V2 D2.0 300	300	26	22	2.0	7
AluLock V2 D2.5 300	300	26	22	2.5	7
AluLock V2 D3.5 300	300	32	22	3.5	8.5
AluLock V2 D4.0 300	300	38	22	3.5	8.5
AluLock V2 D5.0 300	300	32	30	5.0	10



Aluminium Body

Corrosive resistant body

Non-preformed Cable

Unravels when cut, thereby preventing rejoining

Various Cable Diameters


Available with cable $\varnothing$ 1.5mm, $\varnothing$ 2.0mm, $\varnothing$ 2.5mm, $\varnothing$ 3.5mm, $\varnothing$ 4.0mm & $\varnothing$ 5.0mm

One-way Locking

Easy application of seal with one end of the cable permanently secured

Annealed Cable Tip

Easy insertion into aluminium housing

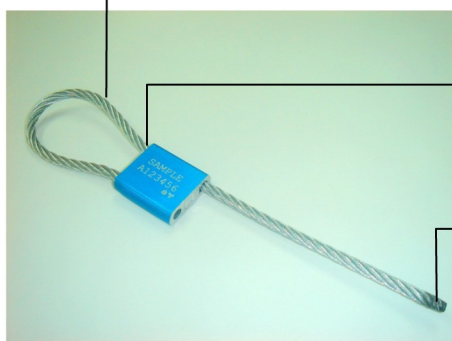

HIGH SECURITY SEALS

PRODUCT INFORMATION

ISC Security Products

Jhr. Mockkade 27 • 2181 AL HILLEGOM NL

T. +31 252 750480 • E. info@security-seals.global • W. www.security-seals.global