


JawLock

ISC

Dimensions

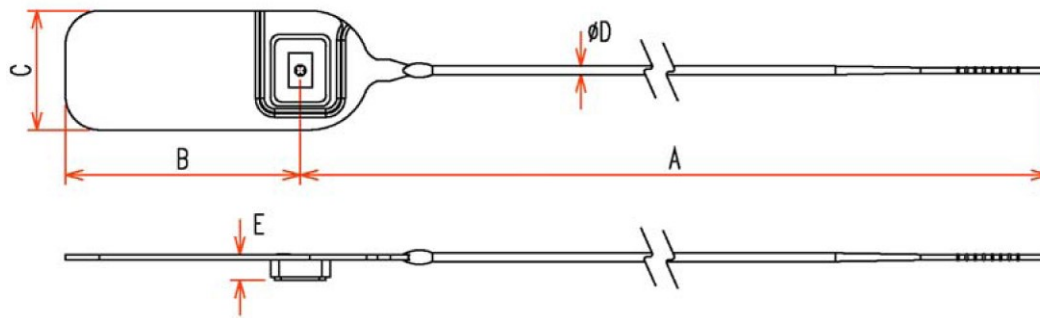

Type	A mm	B mm	C mm	D mm	E mm
JawLock 250	250	55	28	2	6

Specifications

Material : Seal body - Polypropylene

Tensile Strength : Min. 14kg


: Locking Jaw - Metal

Temperature : -20 to 80 °C


Packaging

Product	Carton						
	QTY	omdoos	L	W	H	V(M³)	Weight kg
JawLock 250	1000	5000	370	360	230	0,030	4.81


Applications

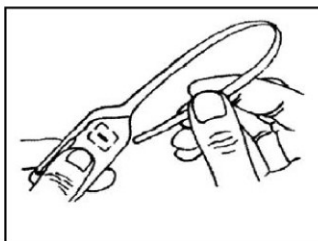

1. Insert strap into locking chamber

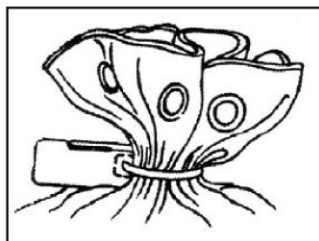

2. Pull tight around object being sealed

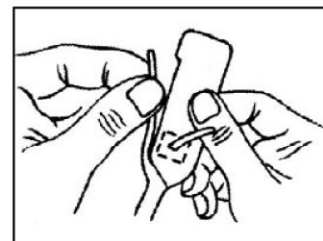

3. Use manual tear off or cutting tool to remove

ISC Security Products

Jhr. Mockade 27 • 2181 AL HILLEGOM NL

T. +31 252 750480 • E. info@security-seals.global • W. www.security-seals.global

Security Seals



INDICATIVE SEALS

TECHNICAL INFORMATION