


Dimensions

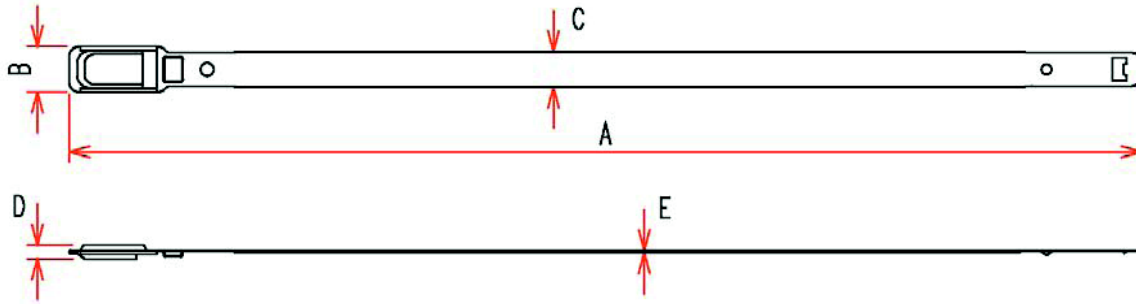

Type	A mm	B mm	C mm	D mm	E mm
MetalLock 2B	193.5	12.4	8.4	2.7	0.4
MetalLock 3B	214	9	7	2.7	0.4

Specifications


Material : Tinplate
Temperature : -40 to 200°C

Tensile Strength : >25kg (MetalLock 2B & 3B)


Packaging

Product	Carton					
	Qty	L	W	H	V(M³)	Weight kg
MetalLock 2B	1000	235	160	170	0,064	4.0
MetalLock 3B	1000	235	160	170	0,064	3.5


Applications

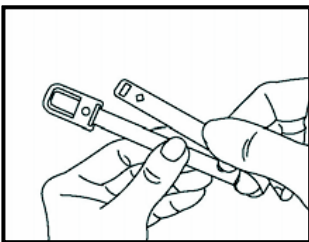

1. Insert seal through the item to be sealed. Ensure logo/serial number is visible once sealed.

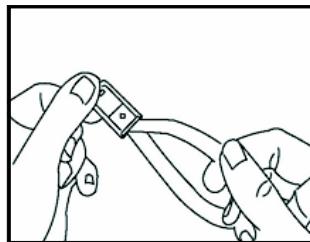

2. Insert strap end it into locking head until 'click' sound is heard. This indicates that seal has been engaged correctly. Pull back the seal tail to ensure that the seal is fastened.

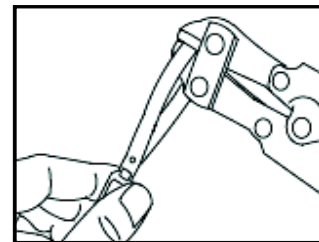

3. Remove seal with cutter when required

Security Seals



SECURITY SEALS

TECHNICAL INFORMATION

ISC Security Products

Jhr. Mockkade 27 • 2181 AL HILLEGOM NL

T. +31 252 750480 • E. info@security-seals.global • W. www.security-seals.global