


Mini JawLock

ISC

Security Seals



Dimensions

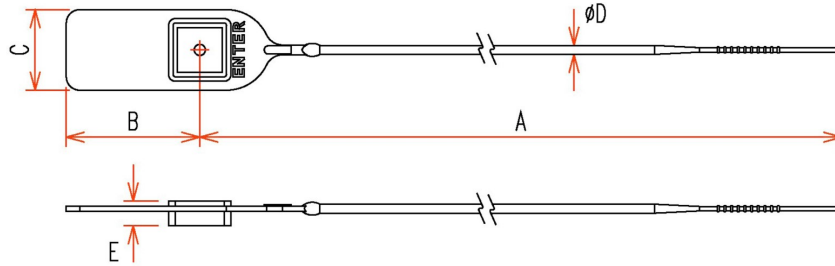

Type	A mm	B mm	B mm Long Tag	C mm	D mm	E mm
Mini JawLock 150	150	30	50	18	2	5.5
Mini JawLock 200	200	30	50	18	2	5.5
Mini JawLock 250	250	30	50	18	2	5.5
Mini JawLock 300	300	30	50	18	2	5.5
Mini JawLock 400	400	30	50	18	2	5.5

Specification


Material : Polypropylene - Metal Jaw
Temperature : -20 to 80 °C

Tensile Strength : >12kg
Format : Mat of 10


Packaging

Product	Carton					
	QTY	L	W	H	V(M³)	Gewicht kg
Mini JawLock 150	1000	240	232	218	0,0121	12.96
Mini JawLock 200	1000	290	232	215	0,0145	14.14
Mini JawLock 250	1000	315	225	210	0,0149	13.57
Mini JawLock 300	1000	365	225	210	0,0172	14.79
Mini JawLock 400	1000	455	225	210	0,0215	16.66
Mini JawLock Nylon 150	1000	240	232	218	0,0121	14.86


Applications



1. Insert strap into locking chamber



2. Pull tight around object being sealed



3. Use manual tear off or cutting tool to remove

ISC Security Products

Essenweg 3 B • 7587 PT DE LUTTE NL

T. +31 252 750480 • E. info@security-seals.global • W. www.security-seals.global

TECHNICAL INFORMATION