


PlaskaLock V2

ISC

Dimensions

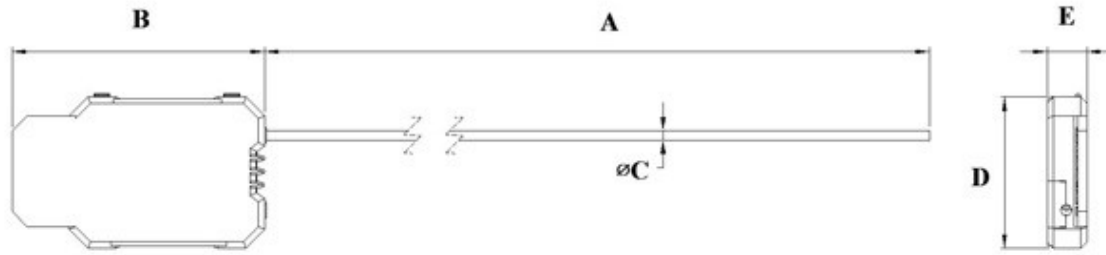

Security Seals



Type	A mm.	B mm.	C mm.	D mm.	E mm.
PlaskaLock V2 D1.5	150	40	1.5	24	6.5
PlaskaLock V2 D2.0	150	40	2.0	24	6.5

Specifications

Material : Body - ABS

Tensile Strength : Ø 1.5 mm - 120kg.


Cable : Non-performed galvanized steel cable

Ø 2.0 mm - 150kg.


Packaging

Product	Carton					
	QTY	L mm.	W mm.	H mm.	Volume m ³	Weight kg
PlaskaLock V2 D1.5	500	300	235	170	0.0120	1.4
PlaskaLock V2 D2.0	500	300	235	170	0.0120	1.4


Applications

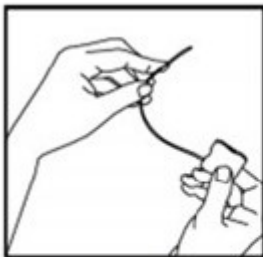


1. Loop the cable through the item to be sealed

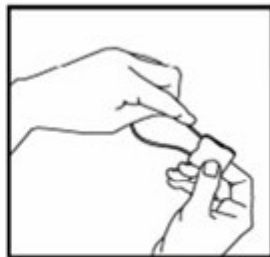

2. Insert the cable through the locking chamber.

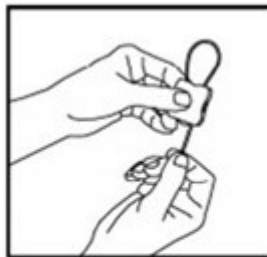

3. Pull the cable all the way through the body until item is tightly sealed, then pull at body to ensure seal is locked

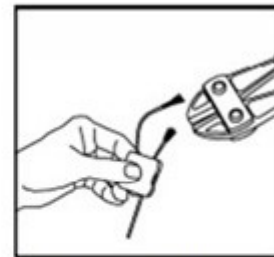

4. Remove seal with the appropriate cable cutters

ISC Security Products

Jhr. Mockkade 27 • 2181 AL HILLEGOM NL

T. +31 252 750480 • E. info@security-seals.global • W. www.security-seals.global

SECURITY SEALS

TECHNICAL INFORMATION